



RUF BRIQUETTING SOLUTIONS

FOR OPTIMAL METAL RECYCLING

Materials

Metal chips that are produced in the metal-working industry can be profitably pressed with RUF briquetting systems.

Through the process of briquetting, the value of residual metals can be increased considerably. A further advantage is the recovery of expensive cutting fluids that can be pressed out of wet chips and then reused.

When melting briquettes, combustion is significantly lower and results in a higher melting yield than with loose chips.

Formats

Metals can be processed into briquettes measuring between 60x40 mm and 150x120 mm. The length of the briquette is variable and can be set between certain predefined limits.

The choice of the briquette format depends on the required throughput as well as the quality of the source material and its bulk density.

Select between round or rectangular briquette shapes.

Benefits

- suitable for fully automatic operation 24/7
- compact design
- low, electrical rating with regard to the briquetting performance
- ▶ higher profits with briquettes compared to loose chips
- ▶ lower combustion and higher melting yield
- recover expensive cutting fluid

Machines

Depending on your requirements, our systems are powered by hydraulic motors of between 4 kW and 90 kW and work at specifically calculated pressures of up to 5,000 kg/cm².

When configuring a briquetting system, we take into consideration all customer-specific needs and thus offer individually customised solutions.

Our compact briquetting systems can directly be integrated into existing production facilites and are designed for a fully automatic 24-hour operation


The throughput capacities of RUF briquetting systems designed for processing metals are between 30 and 4,800 kg per hour.





TECHNICAL SPECIFICATIONS

PROCESS AND FEATURES

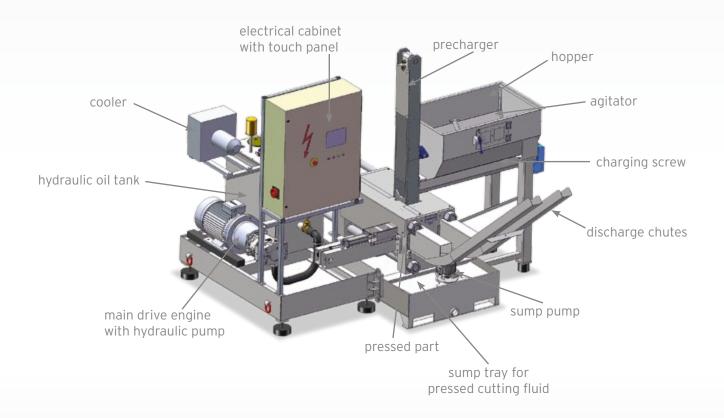

Metal									
Mechanics		Hydraulics		Electrics					
Compact unit mechanics, hydraulics and electricity	•	Hydraulic aggregate	•	Electrical cabinet •					
Hopper with agitator and charging screw	•	Hydraulic oil tank with oil cooler	•	SPS control with control panel •					
Pre-charger with pre-charging screw	•	Recirculation filter	•	Level sensor in hopper •					
Pressed part	•	Ventilation filter	•	Heating electrical cabinet O					
Main pressing ram	•	Low oil trip and overheating protection	•	Cooler electrical cabinet O					
Sump tray for pressed cutting fluid	•	Hydraulic oil	•	Alarm light O					
Discharge chutes	•	Heating for hydraulic oil tank	0						
Briquette conveyor	0	Water cooler	0						
Roll agitator	0								
Multiple conveying screw	0								
Hydraulic lifting and tipping unit	0								
Sump pump	0								
Spraying device	0								
Grinding chips design	0								
Flushing line	0								

MACHINE TYPES

BRIQUETTE FORMATS

METAL	RAP	RUF 4 to RUF 11	RUF 7.5 to RUF 22	RUF 18.5 to RUF 55	RUF 90
Max. throughput rate (kg/h)					
Aluminium	30-50	60-300	130-700	300-1300	1000-2000
Steel & castings	30-80	100-200	130-1200	350-2800	2000-3000
Brass, bronze, copper	50-100	100-220	360-1150	450-2700	3000-4800
Power (kW)	4	4-11	7.5-22	18.5-55	90
Spec. pressure, max. (kg/cm²)	1600-3800	1600-3700	1400-5000	1700-5000	2500-3900
Briquette formats (mm)	60x40 60x60 80x40 Ø80	60x40 60x60 Ø60 Ø80	150x60 150x75 150x120 Ø60 Ø70 Ø80 Ø100	150 x 75 150 x 120 Ø80 Ø100 Ø120	Ø120 Ø150
Briquette length (mm)	30-60	30-100	65-100	65-100	65-150
Size (m) Length x Width x Height	1.3 x 1.0 x 1.6	1.3 x 1.5 x 1.9 to 1.6 x 1.6 x 1.95	2.7 x 2.0 x 2.2 to 3.3 x 2.4 x 2.2	2.9 x 2.4 x 2.2 to 3.3 x 2.4 x 2.2	3.8 x 3.8 x 2.5
Weight (t)	1	1.4-1.8	3.3-4.9	4.6-6	12

Subject to technical modifications - Capacity depends on the source material



Ruf Maschinenbau GmbH & Co. KG

Hausener Str. 101 D-86874 Zaisertshofen Germany

Phone: +49 (0) 8268 9090-20 Fax: +49 (0) 8268 9090-90

info@briquetting.com www.briquetting.com

